



Cast Strainers

Model #60FYS


Class 600 (1/2" to 10")

STANDARD:

Pressure/Temperature Rating: ANSI B16.34

End Flange Dimensions: ANSI B16.5

Wall thickness: ANSI B16.34

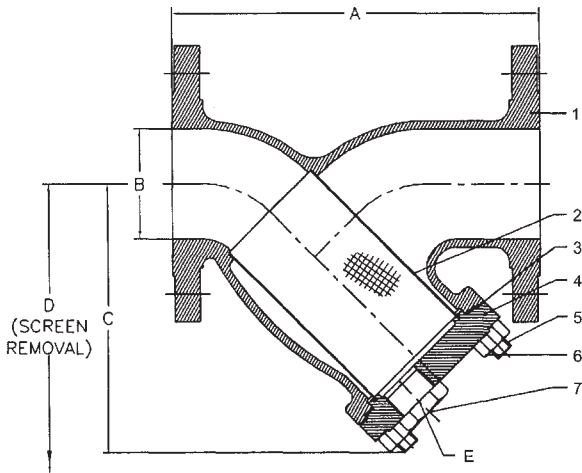

NO.	PART NAME	A 216-WCB	A 351-CF8M	A 351-CN7M
1	BODY	A 216-WCB	A 351-CF8M	A 351-CN7M
2	SCREEN	A 276-304	A 276-316	A 351-CN7M
3	GASKET	SS 304+GRAPHITE	PTFE	PTFE
4	COVER	A 216-WCB	CF8M	A 351-CN7M
5	STUD	A 193-B7	A 193-B8	A 193-B8M
6	HEX NUT	A 194-2H	A 194-8	A 194-8M
7	NPT PLUG	SS 304	SS 316	A 351-CN7M

SIZE	INCH	1/2	3/4	1	1 1/2	2	2 1/2	3	4	6	8	10
	MM	15	20	25	40	50	65	80	100	150	200	250
A	INCH	6.625	8.31	8.31	10.25	11	12	13.5	17.938	25.625	31.75	37.688
	MM	168	211	211	260	279	305	343	456	651	806	957
B	INCH	0.5	0.75	1	1.5	2	2.5	3	4	6	7.875	9.75
	MM	13	20	25	38	51	64	76	102	152	200	247.65
C	INCH	4.0	4.0	4.0	5.3	7	7.0	9.25	12.5	20	24	28.5
	MM	102	102	102	135	179	178	235	318	508	610	724
D	INCH	6.5	6.5	6.5	7.3	9.2	9.25	11.7	15.5	26	32	45.5
	MM	165	165	165	185	211	235	254	394	660	813	1156
E		3/8-18 NPT	1/2-14 NPT	1/2-14 NPT	1/2-14 NPT	1/2-14 NPT	1-11.5 NPT	1-11.5 NPT	1.5-11.5 NPT	2-11.5 NPT	2-11.5 NPT	2-11.5 NPT
Weight	LBS	6	12	12	27	40	60	78	160	364	670	1090
	KGS	3	5	5	12	18	27	35	73	165	304	494

